


Part No.	A nominal Inch (mm)	Grip Range		Clamping Force N (Lbf)
		Min Inch (mm)	Max Inch (mm)	
K360-0332-000-012-HSCB-KS-XXX	0.09 (2.362)	0 (0)	0.5 (12.7)	222 (50) to 444 (100)
K360-0332-012-026-HSCB-KY-XXX	0.09 (2.362)	0.5 (12.7)	1 (25.4)	222 (50) to 444 (100)
K360-0432-000-026-HSCB-YS-XXX	1/8 (3.175)	0 (0)	1 (25.4)	222 (50) to 667 (150)
K360-0532-000-026-HSCB-NS-XXX	5/32 (3.96)	0 (0)	1 (25.4)	222 (50) to 667 (150)
K360-0632-000-026-HSCB-BS-XXX	3/16 (4.76)	0 (0)	1 (25.4)	222 (50) to 1334 (300)
K360-0732-000-026-HSCB-SS-XXX	7/32 (5.55)	0 (0)	1 (25.4)	222 (50) to 1334 (300)
K360-0832-000-026-HSCB-GS-XXX	1/4 (6.35)	0 (0)	1 (25.4)	222 (50) to 1334 (300)
K360-0932-000-026-HSCB-PS-XXX	0.28 (7.14)	0 (0)	1 (25.4)	222 (50) to 1334 (300)
K360-1032-000-026-HSCB-WS-XXX	5/16 (7.94)	0 (0)	1 (25.4)	222 (50) to 2001 (450)
K360-1232-000-026-HSCB-OS-XXX	3/8 (9.52)	0 (0)	1 (25.4)	222 (50) to 2001 (450)
K360-0432-012-038-HSCB-YY-XXX	1/8 (3.175)	0.5 (12.7)	1.5 (38.1)	222 (50) to 667 (150)
K360-0532-012-038-HSCB-NY-XXX	5/32 (3.96)	0.5 (12.7)	1.5 (38.1)	222 (50) to 667 (150)
K360-0632-012-038-HSCB-BY-XXX	3/16 (4.76)	0.5 (12.7)	1.5 (38.1)	222 (50) to 1334 (300)
K360-0732-012-038-HSCB-SY-XXX	7/32 (5.55)	0.5 (12.7)	1.5 (38.1)	222 (50) to 1334 (300)
K360-0832-012-038-HSCB-GY-XXX	1/4 (6.35)	0.5 (12.7)	1.5 (38.1)	222 (50) to 1334 (300)
K360-0932-012-038-HSCB-PY-XXX	0.28 (7.14)	0.5 (12.7)	1.5 (38.1)	222 (50) to 1334 (300)
K360-1032-012-038-HSCB-WY-XXX	5/16 (7.94)	0.5 (12.7)	1.5 (38.1)	222 (50) to 2001 (450)
K360-1232-012-038-HSCB-OY-XXX	3/8 (9.52)	0.5 (12.7)	1.5 (38.1)	222 (50) to 2001 (450)
K360-0432-026-051-HSCB-YR-XXX	1/8 (3.175)	1 (25.4)	2 (50.8)	222 (50) to 667 (150)
K360-0532-026-051-HSCB-NR-XXX	5/32 (3.96)	1 (25.4)	2 (50.8)	222 (50) to 667 (150)
K360-0632-026-051-HSCB-BR-XXX	3/16 (4.76)	1 (25.4)	2 (50.8)	222 (50) to 1334 (300)
K360-0732-026-051-HSCB-SR-XXX	7/32 (5.55)	1 (25.4)	2 (50.8)	222 (50) to 1334 (300)
K360-0832-026-051-HSCB-GR-XXX	1/4 (6.35)	1 (25.4)	2 (50.8)	222 (50) to 1334 (300)
K360-0932-026-051-HSCB-PR-XXX	0.28 (7.14)	1 (25.4)	2 (50.8)	222 (50) to 1334 (300)
K360-1032-026-051-HSCB-WR-XXX	5/16 (7.94)	1 (25.4)	2 (50.8)	222 (50) to 2001 (450)
K360-1232-026-051-HSCB-OR-XXX	3/8 (9.52)	1 (25.4)	2 (50.8)	222 (50) to 2001 (450)
K360-0632-038-064-HSCB-BB-XXX	3/16 (4.76)	1.5 (38.1)	2.5 (63.5)	222 (50) to 1334 (300)
K360-0732-038-064-HSCB-SB-XXX	7/32 (5.55)	1.5 (38.1)	2.5 (63.5)	222 (50) to 1334 (300)
K360-0832-038-064-HSCB-GB-XXX	1/4 (6.35)	1.5 (38.1)	2.5 (63.5)	222 (50) to 1334 (300)
K360-0932-038-064-HSCB-PB-XXX	0.28 (7.14)	1.5 (38.1)	2.5 (63.5)	222 (50) to 1334 (300)
K360-1032-038-064-HSCB-WB-XXX	5/16 (7.94)	1.5 (38.1)	2.5 (63.5)	222 (50) to 2001 (450)
K360-1232-038-064-HSCB-OB-XXX	3/8 (9.52)	1.5 (38.1)	2.5 (63.5)	222 (50) to 2001 (450)
K360-0632-051-076-HSCB-BG-XXX	3/16 (4.76)	2 (50.8)	3 (76.2)	222 (50) to 1334 (300)
K360-0732-051-076-HSCB-SG-XXX	7/32 (5.55)	2 (50.8)	3 (76.2)	222 (50) to 1334 (300)
K360-0832-051-076-HSCB-GG-XXX	1/4 (6.35)	2 (50.8)	3 (76.2)	222 (50) to 1334 (300)
K360-0932-051-076-HSCB-PG-XXX	0.28 (7.14)	2 (50.8)	3 (76.2)	222 (50) to 1334 (300)
K360-1032-051-076-HSCB-WG-XXX	5/16 (7.94)	2 (50.8)	3 (76.2)	222 (50) to 2001 (450)
K360-1232-051-076-HSCB-OG-XXX	3/8 (9.52)	2 (50.8)	3 (76.2)	222 (50) to 2001 (450)

K360-0632-000-026-HSCB-BS-XXX

Kleko360 Hardstop Part Numbering

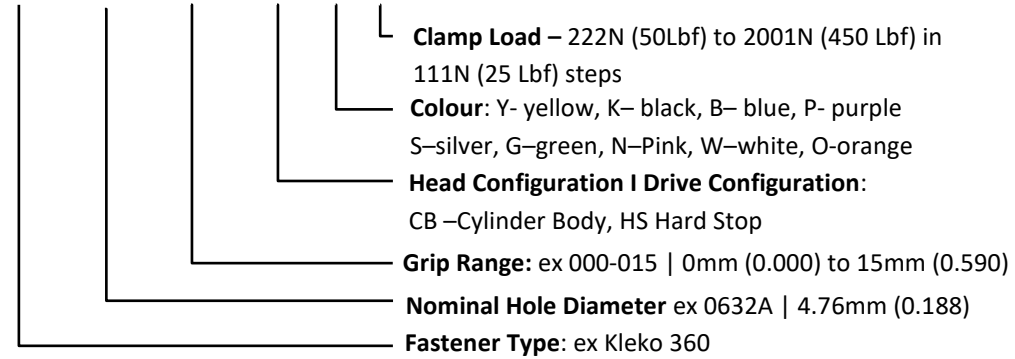

Other loads, tolerances and diameters available to customer requirements upon request and Minimum Order Level (MOL)



Self-clutching mechanism allows for fastener to be set to required clamp load requirement and fastener will hard stop at the required clamp load regardless of the input torque.

E-Mail: sales@kleko360.com

Web: www.kleko360.com

Phone: +44 (0) 20 8064 9729