
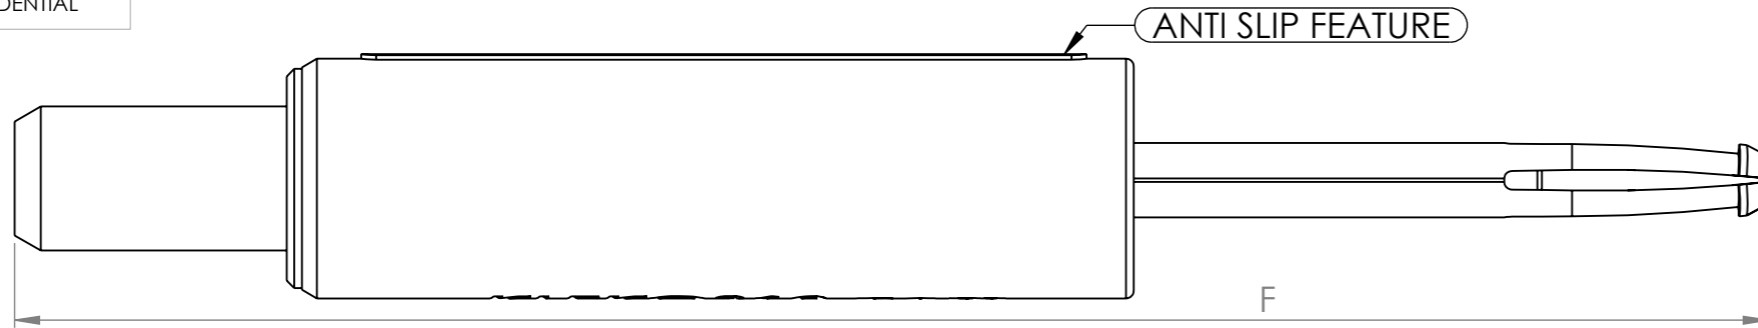


THIS INFORMATION AND DESIGN IS THE INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
01	READY FOR MANUFACTURE	10/02/2022	JN
02	UPDATE TO F FOR 0632/0832	16/05/2022	JN
03	UPDATE SPEC.	15/06/2022	JN
04	0-12mm GRIP RANGE ADDED	22/12/2022	CW

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. BODY GLASSFIBRE REINFORCED NYLON
3. THREAD HEAT TREATED EN24 TO Y CONDITION
4. CLAMPING LEGS HEAT TREATED M300
5. DIP FINISHED IN BOELUBE 70104
6. PATENT NO:

EP2247862
US8517650
GB2455635

Kwikbolt Part Number	HOLE Diameter			Max Ø HOLE		DIAMETER (A)				DRIVE		BODY		GRIP RANGE (D)				E		F		G COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Nominal	Inch	mm	Inch	mm	Max Diameter	Min Diameter	Ø B	Ø C	Min	Max	Min	Max	HEAD HEIGHT	TOTAL	lb	N	lb*in	Nm							
						Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm									
K360-0332-000-012-FXCB-K	17/63	0.093	2.36	0.0945	2.40	0.0925	2.35	0.0913	2.32	3/8	9.53	5/8	15.875	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	BLACK	120	540	3.5	0.4
K360-0332-012-026-FXCB-K	17/63	0.093	2.36	0.0945	2.40	0.0925	2.35	0.0913	2.32	3/8	9.53	5/8	15.875	0.472	12.00	1.024	26.00	2.910	74.0	4.331	110.0	BLACK	120	540	3.5	0.4
K360-0432-000-012-FXCB-Y	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	YELLOW	148	660	4.4	0.5
K360-0432-000-026-FXCB-Y	1/8	0.125	3.18	0.126	3.20	0.122	3.10	0.113	2.86	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	YELLOW	148	660	4.4	0.5
K360-0532-000-012-FXCB-N	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	PINK	148	660	4.4	0.5
K360-0532-000-026-FXCB-N	5/32	0.156	3.97	0.157	4.00	0.153	3.89	0.144	3.65	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	PINK	148	660	4.4	0.5
K360-0632-000-012-FXCB-B	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	BLUE	303	1350	13.3	1.0
K360-0632-000-026-FXCB-B	3/16	0.188	4.76	0.189	4.80	0.185	4.69	0.175	4.45	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	BLUE	303	1350	13.3	1.5
K360-0732-000-012-FXCB-S	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	GREY	303	1350	13.3	1.0
K360-0732-000-026-FXCB-S	7/32	0.219	5.56	0.220	5.60	0.216	5.48	0.204	5.19	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	GREY	303	1350	13.3	1.5
K360-0832-000-012-FXCB-G	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	GREEN	303	1350	13.3	1.0
K360-0832-000-026-FXCB-G	1/4	0.250	6.35	0.268	6.80	0.247	6.27	0.236	5.98	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	GREEN	303	1350	13.3	1.5
K360-1032-000-012-FXCB-W	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.740	95.0	WHITE	453	2015	17.7	2.0
K360-1032-000-026-FXCB-W	5/16	0.313	7.94	0.331	8.40	0.310	7.86	0.298	7.57	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	WHITE	453	2015	17.7	2.0
K360-1232-000-012-FXCB-O	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	0.000	0.00	0.500	12.70	2.910	74.0	3.470	95.0	ORANGE	453	2015	17.7	2.0
K360-1232-000-026-FXCB-O	3/8	0.375	9.53	0.394	10.00	0.372	9.45	0.361	9.16	3/8	9.53	5/8	15.88	0.000	0.00	1.024	26.00	2.910	74.0	4.331	110.0	ORANGE	453	2015	17.7	2.0

- recommended install torque and corresponding clamp load for optimal product life cycle (Kleko360 will produce higher clamp loads if required).

KLEKO360

Fleming Court, Leigh Road,
Eastleigh, Hampshire,
SO50 9PD

Tel: +44(0)23 8064 9729 Email: sales@kleko360.com
Designs / information in this drawing are covered under patents

© kleko360



THIRD ANGLE

COMPUTER PRODUCED DRAWING.
NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 22 December 2022 12:40:41

REVISION 04 DRAWN K FUNG

CHECKED J.NIKLEWICZ

TITLE:

K360-TE-019-04

A3

SCALE: 1:1

SHEET 1 OF 1