




THIS INFORMATION AND DESIGN IS THE
INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

LEG IN CLOSED POSITION




SECTION AA-AA SMALL SURFACE
AREA WHEN LEG (CLOSED)
SCALE 5 : 1

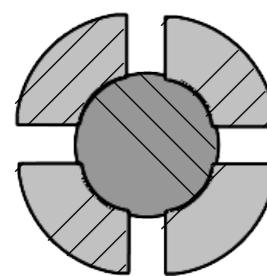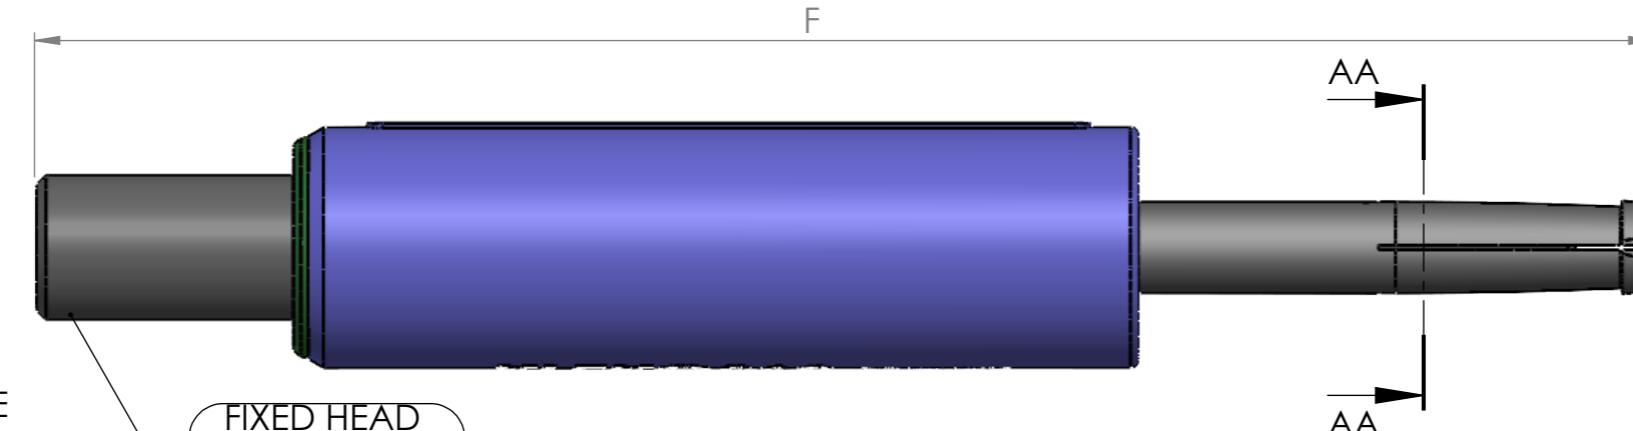

SECTION BB-BB LARGE SURFACE
AREA FOR CLAMPING (OPEN)
SCALE 5 : 1

LEG IN OPEN POSITION

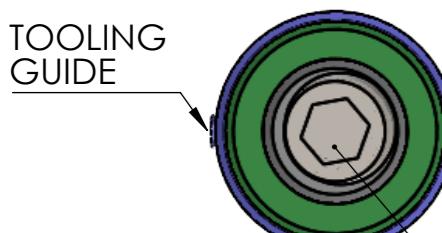

H



REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
01	INITIAL DESIGN	20/09/2024	JN
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

NOTES:

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY
2. BODY GLASSFIBRE REINFORCED NYLON
3. THREAD HEAT TREATED EN24 TO Y CONDITION FOR 0045 TO 0080 FASTENERS
4. THREAD HEAT TREATED M300 FOR 0025 TO 0040 FASTENERS
5. CLAMPING LEGS HEAT TREATED M300
6. DIP FINISHED IN BOELUBE 70104
7. PATENT NO:

EP2247862
US8517650
GB2455635

THIS INFORMATION AND DESIGN IS THE
INTELLECTUAL PROPERTY OF KWIKBOLT LTD


ALL INFORMATION DISCLOSED IS CONFIDENTIAL

KLEKO360

Fleming Court, Leigh Road,
Eastleigh, Hampshire,
SO50 9PD

Tel: +44(0)23 8064 9729 Email: sales@kleko360.com
Designs / information in this drawing are covered under patents

© Kleko360



COMPUTER PRODUCED DRAWING.
NO SCALING / MANUAL ALTERATION ALLOWED

DATE: 24 September 2024 08:26:41

REVISION 02 DRAWN K FUNG
TITLE: K360-TE-M-002-02 A3

CHECKED K PRAJAPATI

THIS INFORMATION AND DESIGN IS THE
INTELLECTUAL PROPERTY OF KLEKO360

ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS

REV.	DESCRIPTION	DATE	APPROVED
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf/in	Nm		
	K360-0050-000-012-Bxcb-RW	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	RED	WHITE	303	1350	13.3
K360-0050-000-026-Bxcb-RS	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	RED	SILVER	303	1350	13.3	1.5
K360-0050-012-038-Bxcb-RY	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	RED	YELLOW	303	1350	13.3	1.5
K360-0050-026-051-Bxcb-RR	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	RED	RED	303	1350	13.3	1.5
K360-0050-038-064-Bxcb-RB	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	RED	BLUE	303	1350	13.3	1.5
K360-0050-051-076-Bxcb-RG	0.197	5.00	0.2047	5.20	0.1949	4.95	0.1890	4.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	RED	GREEN	303	1350	13.3	1.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf/in	Nm		
	K360-0055-000-012-Bxcb-UW	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	LIGHT GREEN	WHITE	303	1350	13.3
K360-0055-000-026-Bxcb-US	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	LIGHT GREEN	SILVER	303	1350	13.3	1.5
K360-0055-012-038-Bxcb-UY	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	LIGHT GREEN	YELLOW	303	1350	13.3	1.5
K360-0055-026-051-Bxcb-UR	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	LIGHT GREEN	RED	303	1350	13.3	1.5
K360-0055-038-064-Bxcb-UB	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	LIGHT GREEN	BLUE	303	1350	13.3	1.5
K360-0055-051-076-Bxcb-UG	0.217	5.50	0.2244	5.70	0.2146	5.45	0.2087	5.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	LIGHT GREEN	GREEN	303	1350	13.3	1.5

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf/in	Nm		
	K360-0060-000-012-Bxcb-EW	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	GREY	WHITE	303	1350	13.3
K360-0060-000-026-Bxcb-ES	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	GREY	SILVER	303	1350	13.3	1.5
K360-0060-012-038-Bxcb-EY	0.236	6.00	0.2441	6.20	0.2343	5.95	0.2283	5.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	GREY	YELLOW	303	1350		

THIS INFORMATION AND DESIGN IS THE
INTELLECTUAL PROPERTY OF KLEKO360
ALL INFORMATION DISCLOSED IS CONFIDENTIAL

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
02	GREY CAP CHANGE FOR 0632	23/09/2024	JN

A

A

B

B

C

C

D

D

E

E

F

F

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf*in	Nm		
	K360-0070-000-012-BXCB-PW	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	PURPLE	WHITE	453	2015	17.7
K360-0070-000-026-BXCB-PS	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	PURPLE	SILVER	453	2015	17.7	2.0
K360-0070-012-038-BXCB-PY	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	PURPLE	YELLOW	453	2015	17.7	2.0
K360-0070-026-051-BXCB-PR	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	PURPLE	RED	453	2015	17.7	2.0
K360-0070-038-064-BXCB-PB	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	PURPLE	BLUE	453	2015	17.7	2.0
K360-0070-051-076-BXCB-PG	0.276	7.00	0.2835	7.20	0.2736	6.95	0.2677	6.80	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	PURPLE	GREEN	453	2015	17.7	2.0

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf*in	Nm		
	K360-0075-000-012-BXCB-OW	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	ORANGE	WHITE	453	2015	17.7
K360-0075-000-026-BXCB-OS	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	1.024	26.0	4.724	120	ORANGE	SILVER	453	2015	17.7	2.0
K360-0075-012-038-BXCB-OY	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	0.472	12.0	1.496	38.0	4.921	125	ORANGE	YELLOW	453	2015	17.7	2.0
K360-0075-026-051-BXCB-OR	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	1.024	26.0	2.008	51.0	5.906	150	ORANGE	RED	453	2015	17.7	2.0
K360-0075-038-064-BXCB-OB	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	1.496	38.0	2.520	64.0	6.890	175	ORANGE	BLUE	453	2015	17.7	2.0
K360-0075-051-076-BXCB-OG	0.295	7.50	0.3031	7.70	0.2933	7.45	0.2874	7.30	3/8	9.53	5/8	15.88	2.910	74	2.008	51.0	2.992	76.0	7.874	200	ORANGE	GREEN	453	2015	17.7	2.0

Kwikbolt Part Number	HOLE Diameter		Max Ø HOLE		Max Diameter		Min Diameter		Ø B		Ø C		HEAD HEIGHT		Min		Max		TOTAL LENGTH MAX		COLOUR	COLOUR	CLAMP LOAD		INSTALL TORQUE	
	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Inch	mm	Ibf	N	Ibf*in	Nm		
	K360-0080-000-012-BXCB-WW	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80	3/8	9.53	5/8	15.88	2.910	74	0.000	0.00	0.472	12.0	3.937	100	WHITE	WHITE	453	2015	17.7
K360-0080-000-026-BXCB-WS	0.315	8.00	0.3228	8.20	0.3130	7.95	0.3071	7.80																		